



CC122

Tandem Asphalt Roller



Technical data

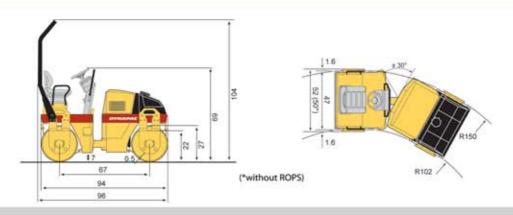

·w	eı	a	hτ	51	ID:	51
	77	-	9	-	1	-

Max. operating weight	5,975
Operating weight (incl. ROPS)	5,735
Drum module weight, front/rear	2.780/2.955

Traction

Speed range (mph)	0-6
Vertical oscillation (")	±10
Theor, gradeability (%)	45

Compaction

Static linear load, front/rear (pli)	59/63
Nominal amplitude (in)	0.02
Vibration frequency (vpm)	3,480/4,020
Centrifugal force per drum (lb)	6,120/8,170
Water tank (gals)	42

Engine

Model	Deutz D2011 L02 I
Type	Air cooled Diesel
Rated power, SAE J1995, @ 2,800 rpm, hp	30
Fuel tank capacity (gals)	13

Hydraulic system

Driving

Vibration Steering Service brake Parking/Emergency brake Axial piston pump with variable displacement and servo.

2 radial piston motors with constant displacement.

Gear pump/motors with constant displacement.

Gear pump with constant displacement.

Hydrostatic in forward and reverse lever,

Failsafe multidisc brake in both drums.

Standard equipment

Adjustable seat, Automatic Vibration Control (AVC), Automatic Water Control (AWC), Electric front drum vibration shutoff, Emergency stop, Filter for sprinkler system, Filters for sprinkler nozzles, Foldable ROPS, Horn, Hourmeter, Hydraulic pressure checkpoints, Interlock, Lifting points, Main battery switch, ROPS bar and seat belt, Rubber mounted operation platform, Spring loaded scrapers, Strainer for water tank, Vibration on/off in F/R lever, Warning lights for brakes, Warning lights for charging, Warning light for engine oil pressure, Warning light for engine temperature