

Belt

Bucket

Models

The E-Z LIFT Belt Bucket Conveyor is a medium duty conveyor designed to move loose materials up to a 45° incline. The conveyor is lightweight and compact – fits into basement windows and cellars.

BB-050

EZLIFT®

Typical uses include:

- Dirt, gravel, coal, dry sludge, recycling, and many bulk materials.

Features include:

- 10" wide heavy duty 2 ply rubber belt with 2" or 4" deep rubber buckets on 24" centers and 2" or 4" steel side walls
- 7/8" O.D. high strength steel tubing truss frame – 1-1/4" O.D. on 36 ft. model
- Approximate 120 FPM constant belt speed
- Conveyor belt take-up adjustments
- Self-cleaning drive and idler belt pulleys
- Drive mounted at side of discharge end
- For electric motor – direct drive speed reducer
- For gas engine – internal V-belt and roller chain reduction, and safety guards
- Operating, maintenance, and safety instructions

Accessories:

- Electric motor or gas engine
- Start/Stop switch for electric motor
- Fork pockets
- Hopper
- Dolly and hitch assembly
- Tail-light assembly
- Towable elevating carriage

Options:

- Smooth belt
- Mini-cleated belt
- Straight cleats
- Forward/Stop/Reverse switch for electric motor



2" Buckets-13" frame depth


Model	Length	Approx. Wgt.*
30	16 ft.	290 lbs.
31	21 ft.	350 lbs.
33	26 ft.	406 lbs.
35	31 ft.	475 lbs.
37	36 ft.	560 lbs.

4" Buckets-19" frame depth

Model	Length	Approx. Wgt.*
40	16 ft.	306 lbs.
41	21 ft.	370 lbs.
43	26 ft.	430 lbs.
45	31 ft.	506 lbs.
47	36 ft.	596 lbs.

CAPACITY-2" & 4" buckets

Lbs./Cu. Ft.	Tons/Hr. @ 30° Incline	
	2"	4"
30	25	50
50	42	70
75	63	100

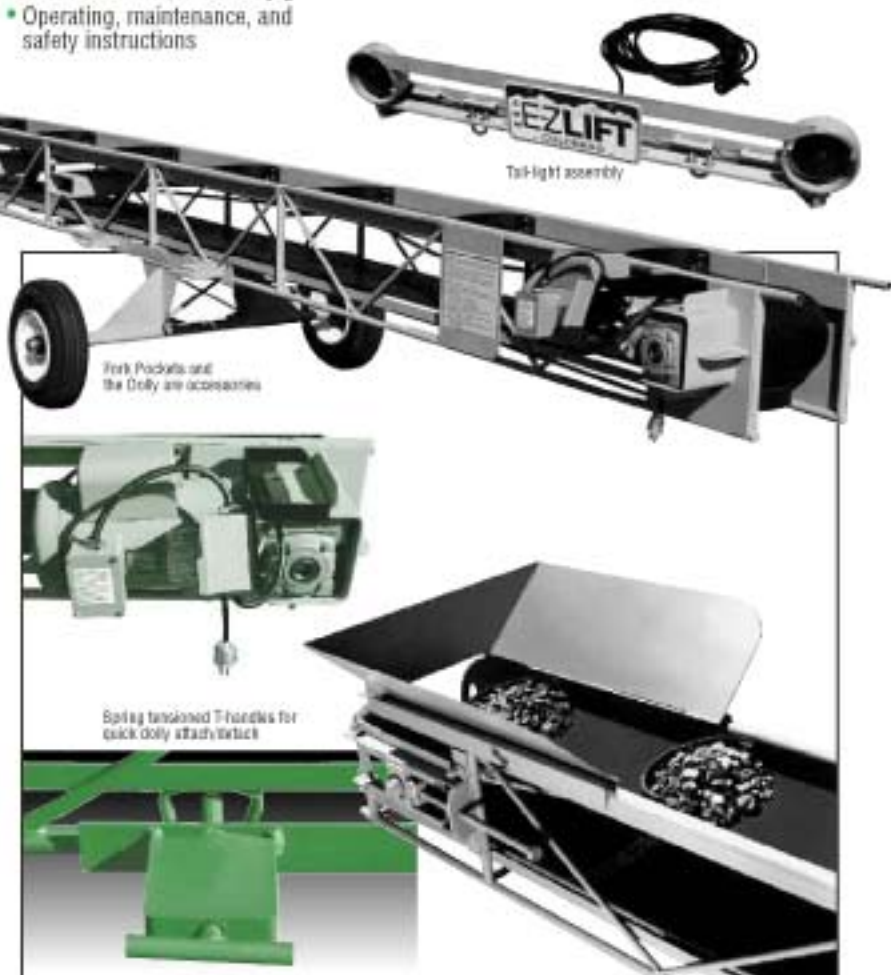

Fork Pockets and the Dolly are accessories

Spring tensioned T-handles for quick dolly attach/detach

Multilift, Inc.

2000 South Cherokee, Denver, Colorado 80223
 Denver Area: 303.733.5533 FAX 303.733.5642
 North American Toll Free: 1.800.821.9966

GT Rentals
 718-782-7887

Specifications subject to change without notice
*Weight w/accessories