



THE BULLET  
PUMPS

## SLIM-LINE DEWATERING PUMPS



### TOP DISCHARGE AND PERFORMANCE

**THE BULLET™** are ideal for dewatering construction sites, mines, circulating fountain water, or for all around use in industrial plants and utilities.

### COST, QUALITY AND PERFORMANCE

With the lightweight and compact design of **THE BULLET™** you will get top performance and excellent quality for a very modest investment.

### **THE BULLET™** - THE BEST IN FEATURES & BENEFITS.

**Top Discharge** – Allows for superior cooling of motor and provides a slim line design.

**Longer Power Cord** – Standard 33 ft. power cord on pumps 1/2 HP and below and 50 ft. on pumps 1 HP and above.

**304SS Motor Housing** – Superior abrasion resistance will not wear out like aluminum motor housings when pumping sandy water.


**Three Seal Motor Protection** – Motor is protected by double mechanical seals. Lower seal made of silicon carbide/silicon carbide and upper seal is made of carbon/ceramic. An additional lip seal has been installed above the impeller, to help prevent abrasives such as dirt, silt or sand, from entering into the seal chamber.

**More Motor Protection** – Winding protection and (NEMA) Class F motor insulation allows motor temperature to raise to 230°F, superior to pumps with Class A, B, and E insulation.

Automatic switch turns pump motor off if temperature and/or amp draw raises too high. When the motor cools the switch will automatically reset and the pump will turn back on.

**Tough Pump Construction** – Hardened cast iron stands up to rough handling and pumping sandy water unlike pumps with soft resin impellers or plastic exterior components.

**R400D Special Feature** – **THE MOP-UP™** pumps down to 1/12th of an inch. It features a special diaphragm valve that prevents water backflow.

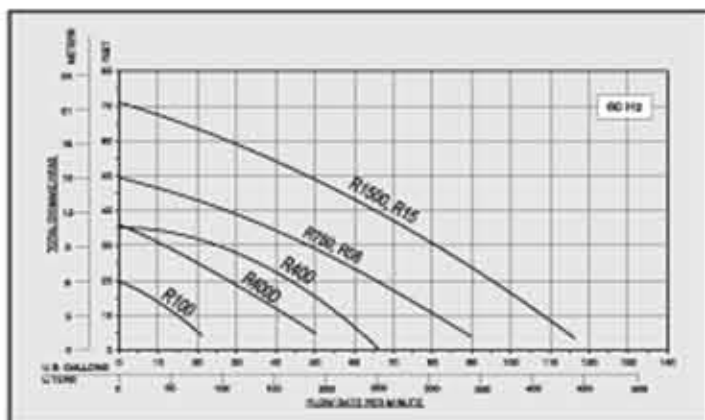

R400  
R400D  
R750  
R1500

MODEL	DISCH. SIZE	H.P.	VOLT	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS.	HEIGHT	WIDTH	CABLE
R100	1 1/4"	0.15	115	2	1/8"	19'	21	13	9'	5.5"	33'
R400	2"	0.5	115	6	1/8"	35'	66	33	14.6'	7.1"	33'
R400D	2"	0.5	115	6	N/A	36'	50	33	14.6'	7.1"	33'
R750	2"	1	115 or 230	14/7	1/4"	49'	89	68	19.3'	7.3"	50'
R1500	2"	2	230	14	1/4"	71'	116	80	20.5'	7.3"	50'
R08	2"	1	230/460	3/1.5	1/4"	49'	89	66	19.3'	7.3"	50'
R15	2"	2	230/460	6/3	1/4"	71'	116	68	19.3'	7.3"	50'

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

WARNING: Not for use in any flammable liquids.



123 Spencer Plain Road  
P.O. Box 1138  
Old Saybrook, CT 06475  
Tel: (860) 399-5937  
Toll Free: (877) BJM-PUMP  
Fax: (860) 399-7784  
Web: www.bjmpumps.com

Distributor:

GT Rentals 718-782-7887  
Greenpoint Brooklyn