




TRLR70XF

Tandem Axle Trailer

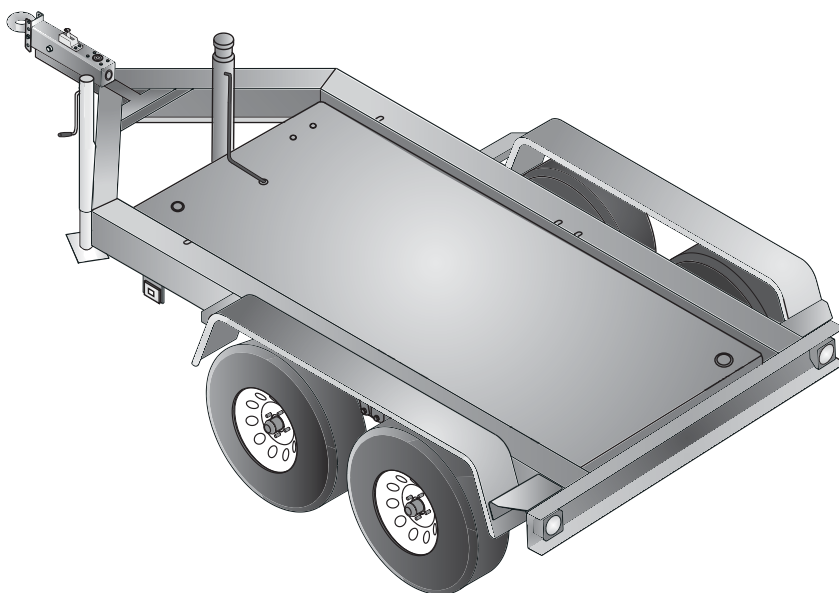

TRLR70XF Technical Data			
Gross Vehicle Weight Rating (GVWR)	6,000 lbs	Tire Size	ST205/75D14 LR-C
Gross Axle Weight Rating (GAWR)	3,500 lbs (ea.)	Wheel Bolt Pattern	5 Lug on 5.5 in
Hydraulic Actuator Rating	7,500 lbs	Tire Load Rating	1,760 lbs (ea.)
Coupler Rating	See Coupling Options on reverse page	Dimensions (LxWxH)	See Dimensions Drawing on reverse page

Standard Trailer Features

- Fits MQ Power Generator Model DCA45SS, DCA70SSI
- Tandem-axle Design with Spring Type Suspension
- H.D. Welded Steel Frame Construction
- Formed Channel for Generator Mounting and Support
- Integral Fuel Cell; Single-wall Steel Design, 52 Gallon Capacity
- Replaceable, Bolt-on Hydraulic Brake Actuator
- Surge Hydraulic-actuated Drum Brakes (all axles)
- Hydraulic Uni-servo Drum Brakes - 10-inch Cluster (allows 15-20% braking in reverse)
- D.O.T. Steel Brake Lines, Brass Tees & Rubber Hydraulic Brake Hoses
- 4-hole Channel Allows 3-position, Adjustable Coupler Height; 4-inches O/A
- Tongue Mounted Swivel Jack with Flat Disc-foot (rated 2,000 pound lift)
- Replaceable, Bolt-on Steel Fenders
- Powder Coat Paint Process including: Frame, Channel, Actuator & Fenders
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps



TRLR70XF

Tandem Axle Trailer

Optional Trailer Equipment

- Electric Drum Brakes (all axles)
- Electric Breakaway Safety Device (electric-actuated brakes)
- Adjustable 2-inch Ball Coupler
- Adjustable 2 5/16-inch Ball Coupler
- Adjustable 3-inch Pintle-eye Coupler
- Rear Stabilizer Stands
- Tongue Mounted Utility Storage Box
- Anti-Theft Wheel Lock
- Spare Tire with Locking Mount


Coupler Options

3" Pintle Eye
20,000 lbs.




#EE36264

2" Ball Coupler
10,000 lbs.





#EE43254

2-5/16" Ball Coupler
14,000 lbs.



#EE43253

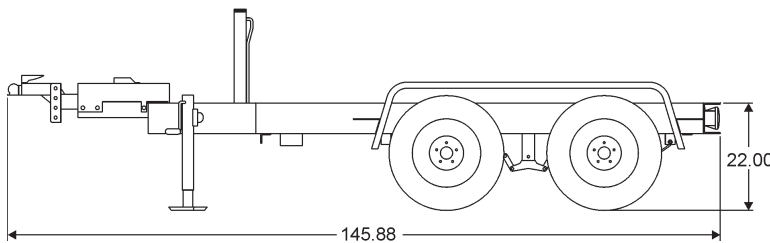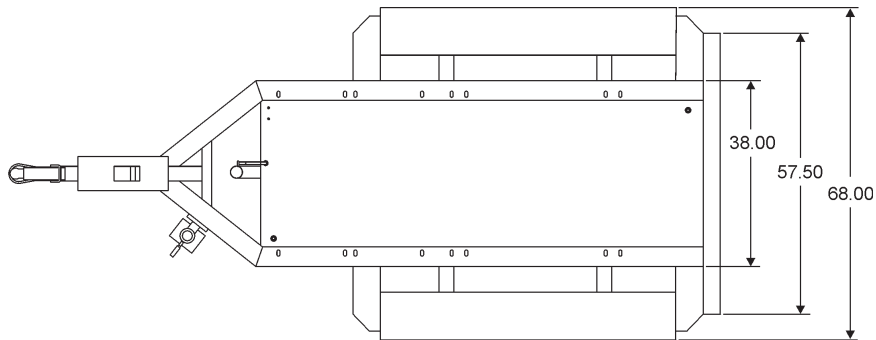

Trailer Weight

Without fuel	With fuel
765 lbs (347 kg)	1,134 lbs (515 kg)

Your MQ Power dealer is:



MQ POWER

POST OFFICE BOX 6254

CARSON, CA 90749

310-537-3700 • 800-421-1244

FAX: 310-632-2656

E-MAIL: mqpower@multiquip.com

WEBSITE: www.mqpower.com